


□

Technical Parameter

Model	LKTB1-50/PV
Product Picture	
Pole	2P
Rated Voltage	120-500VDC
Rated Current In(A)	6, 10, 16, 20, 25, 32, 40, 50, 63
Rated Insulation Voltage Ui(V)	1000
Rated Impact Voltage Uimp(kV)	6
Biggest Block Ability Icu(kA)	6
Instantaneous Tripping Characteristics	C
Connection	
Life	Mechanical Life: 20000 Electric Life: 1500
Working Temperture(°C)	-25~55
DIN rail(mm)	35
Weight(g)	165
Standard	IEC60898-1

□ **Dimension Drawing**

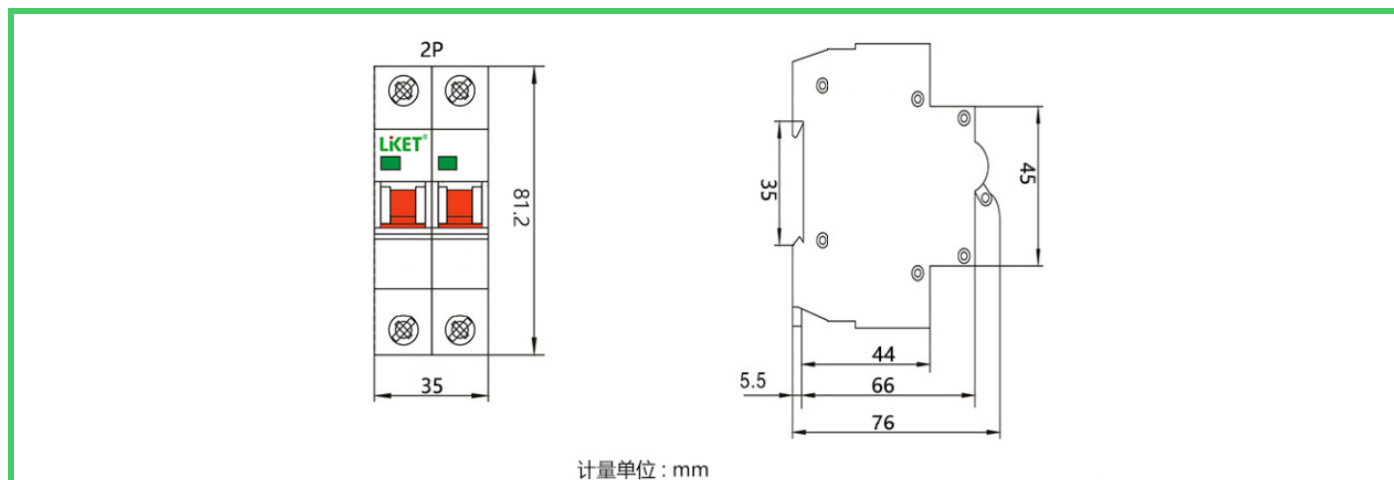

□ **Characteristics Curve**

